


\* IF USING A-LOK CONNECTOR, GROUT FROM THE BOTTOM OF THE PENETRATION TO THE SPRINGLINE OF THE PIPE.

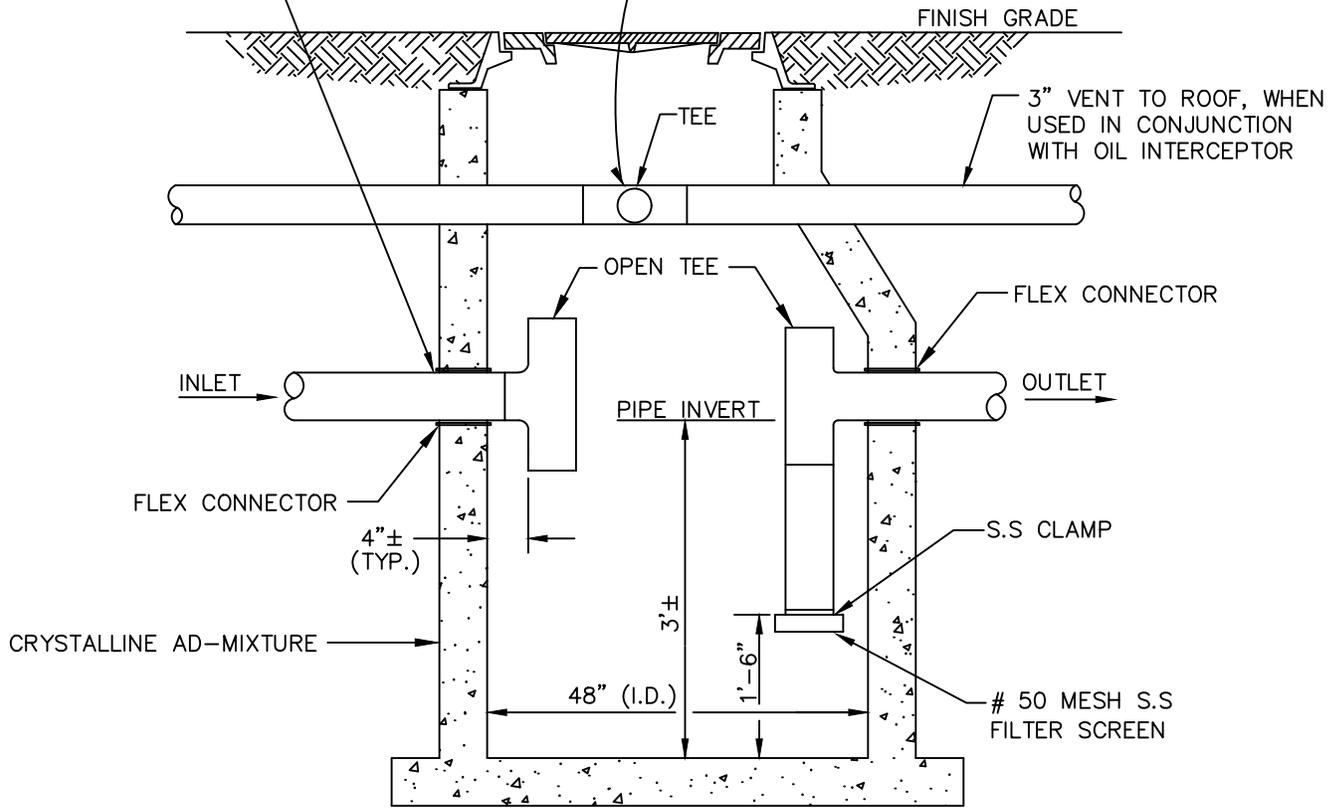

**NOTES:**

1. REFER TO STANDARD MANHOLE TOHO-07 AND MISCELLANEOUS MANHOLE TOHO-08 FOR ADDITIONAL REQUIREMENTS
2. SAND/MUD TRAP SHALL BE INSTALLED UPSTREAM OF THE OIL INTERCEPTOR IF USED IN CONJUNCTION