


UN-DEVELOPED LOT

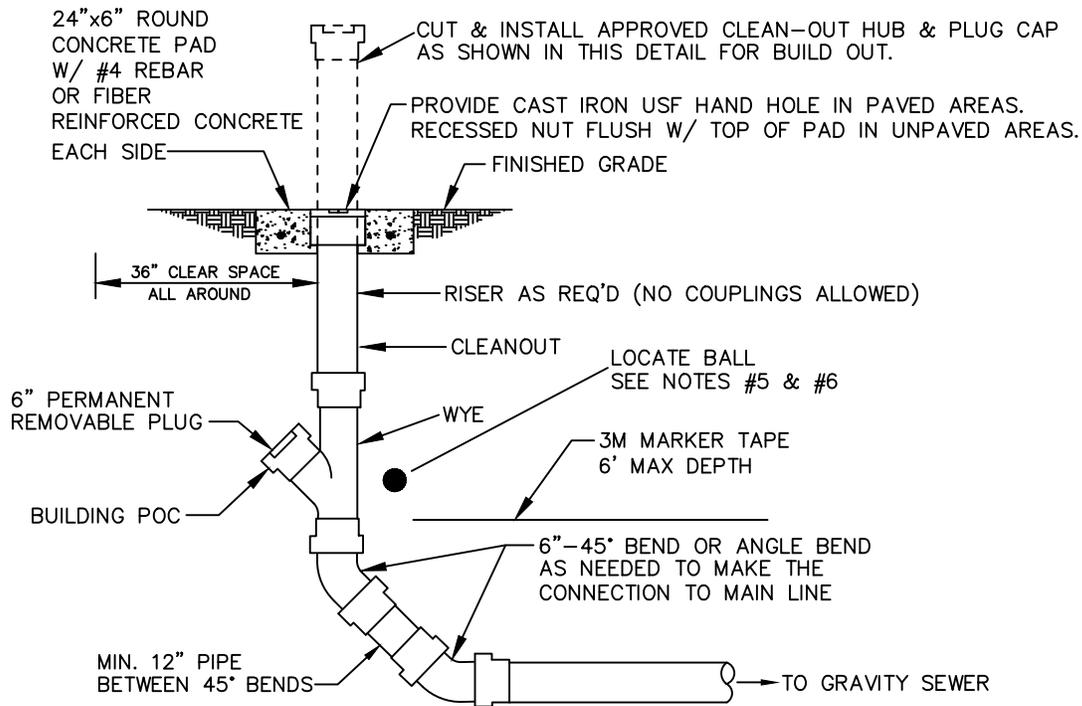

LOT BUILD OUT

NOTES:

1. SITE CONTRACTOR SHALL LEAVE THE CLEANOUT RISER 3' - 4' ABOVE FINISHED GRADE. AT LOT BUILD OUT THE RISER SHALL BE CUT AND CAPPED WITH A CLEANOUT HUB AND CAP INSTALLED IN A CONCRETE PAD SET FLUSH WITH FINISH GRADE
2. CLEANOUT CAPS SHALL HAVE BE SLOTTED OR HAVE A RECESSED NUT
3. LATERALS SHALL BE MARKED WITH A 3" HIGH "S" IN THE CURB OR SIDEWALK ADJACENT TO A PARKING SPACE WHERE THE LATERAL CROSSES THE CURB OR SIDEWALK.
4. NO PLANTINGS, STRUCTURES, OR OTHER UTILITIES, INCLUDING BUT NOT LIMITED TO TELECOM PEDESTALS, ELECTRICAL TRANSFORMERS OR POLES, OR OTHER CLEANOUTS USED FOR TESTING PURPOSES SHALL BE INSTALLED WITHIN 36" OF ANY SIDE OF THE TOHO CLEANOUT.
5. PROVIDE TOHO APPROVED LOCATE BALLS AT ALL SINGLE AND DOUBLE SERVICE WYES
6. PLUMBER SHALL CONNECT TO SERVICE WYE WITH GASKETED PUSH FITTING ONLY. GLUE OR NON GASKETED FITTINGS SHALL NOT BE PERMITTED
7. SEE SANITARY SEWER LATERAL DETAIL TOHO-05 FOR ADDITIONAL NOTES AND REQUIREMENTS