


SECTION VIEW

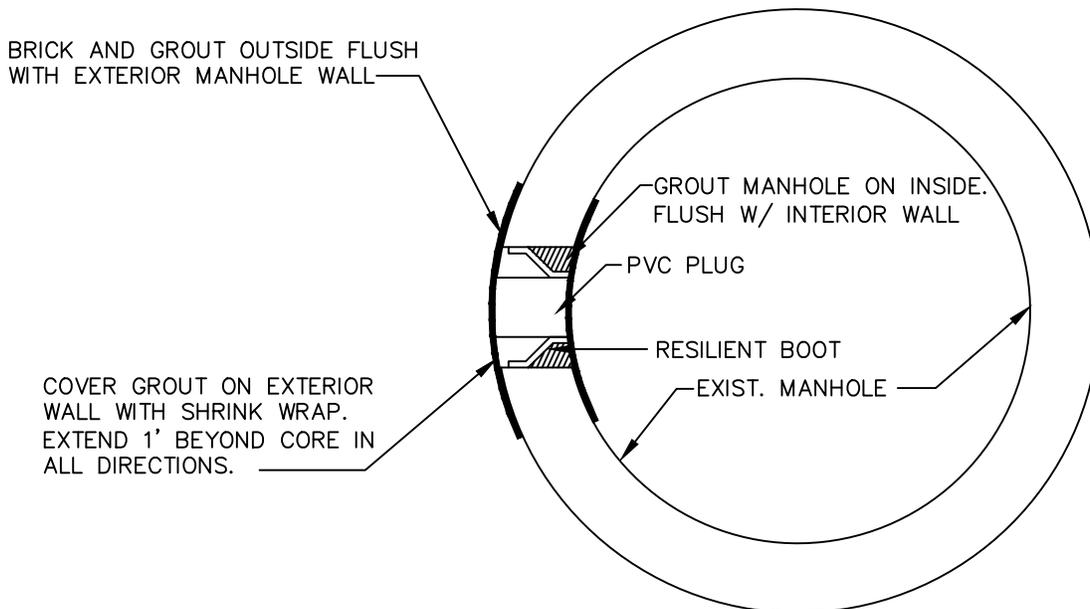

PLAN VIEW

NOTES:

1. ALL GROUT FILL USED INSIDE A POLYMER MANHOLE SHALL BE POLYMER GROUT AS SPECIFIED BY THE MANHOLE PRECASTER
2. ALL PORTLAND CEMENT, GROUT, OR CONCRETE FILL USED INSIDE A STANDARD PRECAST OR OUTSIDE OF A STANDARD OR POLYMER MANHOLE SHALL REQUIRE XYPEX ADMIX C-1000 RED, XYPEX XYCRYLIC ADMIX, OR APPROVED EQUAL
3. WHERE ABANDONED CORE IS WITHIN 1' OF THE BOTTOM OF THE STRUCTURE, THE BENCH SHALL BE CONSTRUCTED TO COVER THE REPAIR