



PLAN VIEW

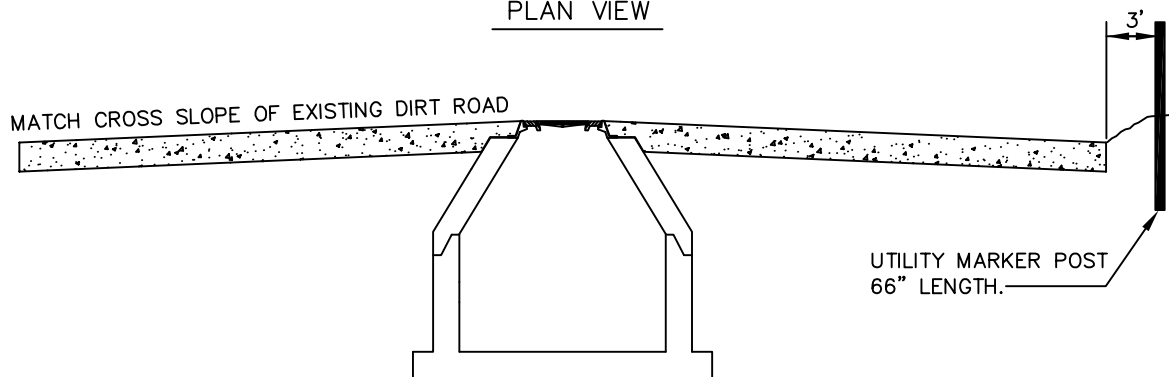

SECTION A-A

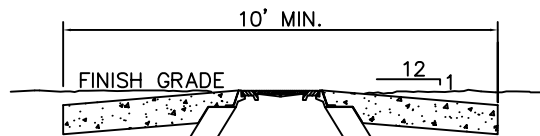

SECTION B-B

NOTES:

1. SLAB SHALL BE 8" MINIMUM REINFORCED WITH #4 REBAR, 12" OCEW OR EQUIVALENT WIRE MESH.
2. FIBER REINFORCED CONCRETE IS NOT PERMITTED.
3. UTILITY MARKER POST SHALL BE PLACED 3' OFF THE EDGE OF THE ROADWAY BUT NOT OUTSIDE OF THE RIGHT-OF-WAY.
4. IF MANHOLE IS NOT LOCATED WITHIN A ROAD, THE MINIMUM PAD WIDTH SHALL BE 5'X5' AND THE TOP OF THE PAD SHALL BE 6" ABOVE FINISH GRADE.



EFFECTIVE DATE:	04/01/2025
BOARD APPROVED DATE:	01/22/2025
PREVIOUS VERSION:	2022
DRAWN BY:	MP
REVISED BY:	DT

DIRT ROAD MANHOLE PROTECTOR

DRAWING NUMBER

27